

LED RECESSED DOWNLIGHT

32W 200mm cut-out (8")



KEY DATA

Power	32W
IP Rating	IP20
Dimensions	φ220×52mm
Cut-out size	φ200mm
Luminous Flux	3100Lm
Colour Temperature	4000K/6500K
Warranty	One year

Model Number

DL RD 32w

TECHNICAL SPECIFICATIONS

Input Voltage	100-240V AC
Power Factor	0.96
LED Type	SMD 2835
LED Luminous Flux	4032Lm
Luminous Efficacy	97Lm/W
LED Manufacturer	RUNLITE
LED Circuit Mode	(24)S*(7)P=(168)PCS
LED Board Base Type	1060
Driver Output	72VDC 400mA
Driver Specifications	Non-Isolated
Total Circuit Power (W)	32±2
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Supply Current	139mA
Operating Temp.	-15 to +50°C
Lifespan	30,000 hours

Fire Rating

V-0

Energy Efficiency Index (EEI)

0.16 (A+)

Diffuser Material

Polystyrene


Housing Material/Colour

Aluminium/White


Weight

918g

DIMENSIONS

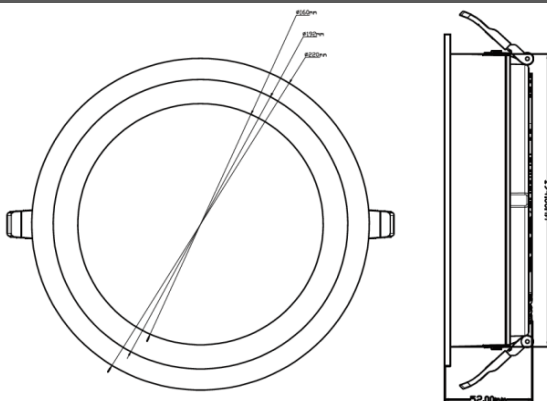

LIGHT & LUX DISTRIBUTION CURVE

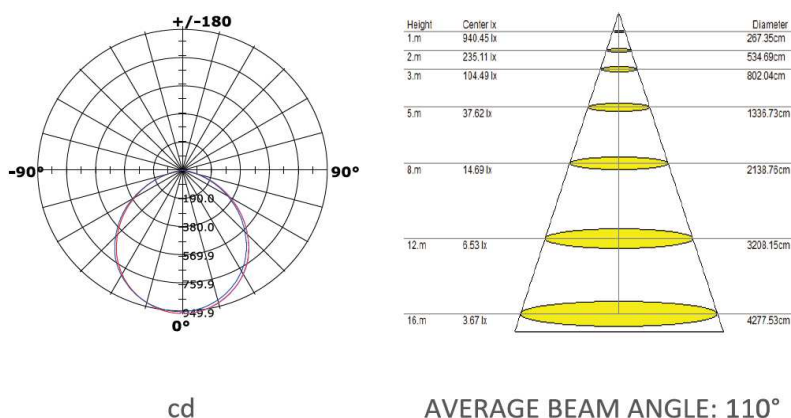

PRODUCT FEATURES:

1. Using high lumen SMD light source
2. Using good reflectivity light, it is thinner and brighter, the light is more equally.
3. Low voltage & constant current driver, no glare, the light is soft.
4. Launch in 0.01sec, no flashing, no noise, no radiation and energy saving.
5. This product can show high brightness, without seeing the lamp itself.