The Commercial
LED Lighting Specialist

**LED FLOOD LIGHTS** 

**PRODUCT CATEGORY DATA SHEET** 

# LED Module Flood Light | 25W




#### **FEATURES:**

| Brand         | Superlight   |
|---------------|--------------|
| Wattage       | 25W          |
| Voltage       | 220-240V AC  |
| Lifetime      | 20.000 hours |
| Power Factor  | >0.5         |
| Luminous Flux | 2.500Lm      |
| Colour        | 6500K        |
| Dimensions    | 157x94x67mm  |
| Warranty      | One year     |
|               |              |

**Model Number** 

25w Flood Light

#### **Dimension:**




## Front View


## **Advantages:**

- IP67, isolated driver, much safer.
- Light weight and easy to combine.
- Small size, save space, more quantities for one container.
- Plastic lens, breeakage-proof.
- High lumen output.
- Less light pollution, energy saving.

#### **Light Distribution Curve:**

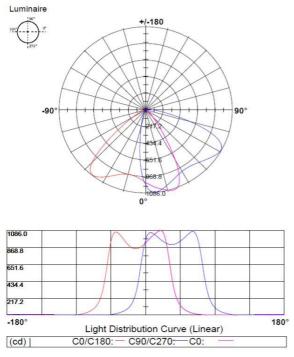

#### **Lux-Distance Curve:**

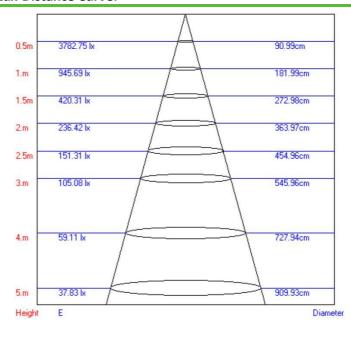

Beam Angle:84.60°

LED Module Flood Light | 50W



#### **FEATURES:**

| Brand         | Superlight   |
|---------------|--------------|
| Wattage       | 50W          |
| Voltage       | 220-240V AC  |
| Lifetime      | 20.000 hours |
| Power Factor  | >0.5         |
| Luminous Flux | 5.000Lm      |
| Colour        | 6500K        |
| Dimensions    | 157x188x67mm |
| Warranty      | One year     |
|               |              |


**Model Number** 

**50w Flood Light** 


### Advantages:

- IP67, isolated driver, much safer.
- Plastic lens, breeakage-proof.
- High lumen output.
- Less light pollution, energy saving.

## **Light Distribution Curve:**

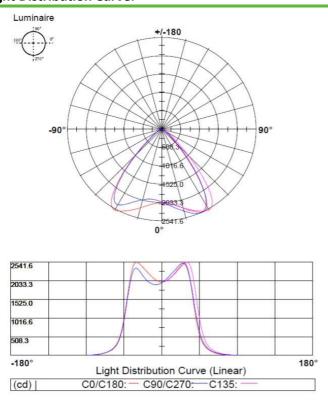

#### **Lux-Distance Curve:**



Beam Angle:82.20°

LED Module Flood Light | 50W



#### **FEATURES:**

| Brand         | Superlight   |  |  |
|---------------|--------------|--|--|
| Wattage       | 50W          |  |  |
| Voltage       | 220-240V AC  |  |  |
| Lifetime      | 20.000 hours |  |  |
| Power Factor  | >0.5         |  |  |
| Luminous Flux | 5.000Lm      |  |  |
| Colour        | 6500K        |  |  |
| Dimensions    | 157x188x67mm |  |  |
| Warranty      | One year     |  |  |
|               |              |  |  |


**Model Number** 

**50w Flood Light** 


### Advantages:

- IP67, isolated driver, much safer.
- Plastic lens, breeakage-proof.
- High lumen output.
- Less light pollution, energy saving.

## **Light Distribution Curve:**

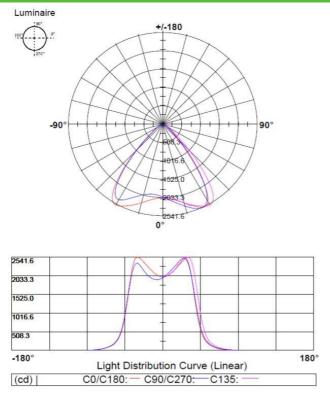

## **Lux-Distance Curve:**



Beam Angle:82.20°

LED Module Flood Light | 100W



#### **FEATURES:**

| Brand         | Superlight   |
|---------------|--------------|
| Wattage       | 100W         |
| Voltage       | 220-240V AC  |
| Lifetime      | 20.000 hours |
| Power Factor  | >0.5         |
| Luminous Flux | 10.000Lm     |
| Colour        | 6500K        |
| Dimensions    | 314x188x67mm |
| Warranty      | One year     |
|               |              |


**Model Number** 

100w Flood Light


### Advantages:

- IP67, isolated driver, much safer.
- Plastic lens, breeakage-proof.
- High lumen output.
- Less light pollution, energy saving.

## **Light Distribution Curve:**

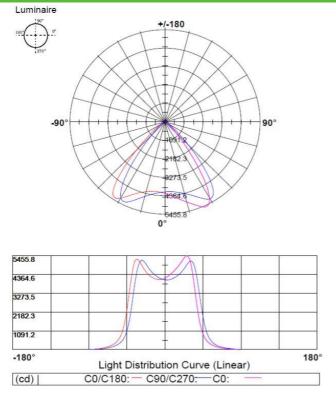

## **Lux-Distance Curve:**



Beam Angle:81.20°

LED Module Flood Light | 150W



#### **FEATURES:**

| Brand         | Superlight   |  |  |
|---------------|--------------|--|--|
| Wattage       | 150W         |  |  |
| Voltage       | 220-240V AC  |  |  |
| Lifetime      | 20.000 hours |  |  |
| Power Factor  | >0.5         |  |  |
| Luminous Flux | 15.000Lm     |  |  |
| Colour        | 6500K        |  |  |
| Dimensions    | 314x282x67mm |  |  |
| Warranty      | One year     |  |  |
|               |              |  |  |


**Model Number** 

150w Flood Light


### Advantages:

- IP67, isolated driver, much safer.
- Plastic lens, breeakage-proof.
- High lumen output.
- Less light pollution, energy saving.

## **Light Distribution Curve:**

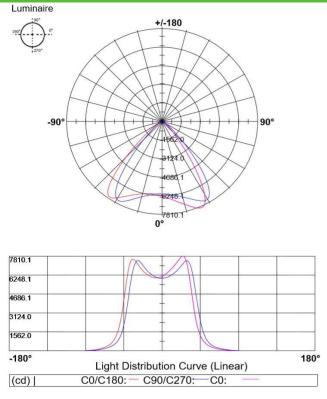

#### **Lux-Distance Curve:**



Beam Angle:82.20°

# **LED FLOOD LIGHT**

# Summary

| Model Number     | Decription   | Power | Colour Temperature | Lumens  |
|------------------|--------------|-------|--------------------|---------|
| 25w Flood Light  | 157x94x67mm  | 25W   | 6500K              | 2500Lm  |
| 50w Flood Light  | 157x188x67mm | 50W   | 6500K              | 5000Lm  |
| 75w Flood Light  | 157x282x67mm | 75W   | 6500K              | 7500Lm  |
| 100w Flood Light | 314x188x67mm | 100W  | 6500K              | 10000Lm |
| 150w Flood Light | 314x282x67mm | 150W  | 6500K              | 15000Lm |

https://www.superlight.tn 6