


LED RECESSED DOWNLIGHT | 24W 200×200mm CUT-OUT (8")

LED RECESSED DOWNLIGHT


24W 200×200mm cut-out (8")



Dimensions:

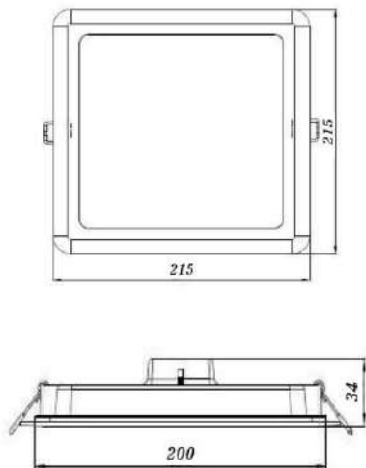

Light & Lux Distribution Curve:

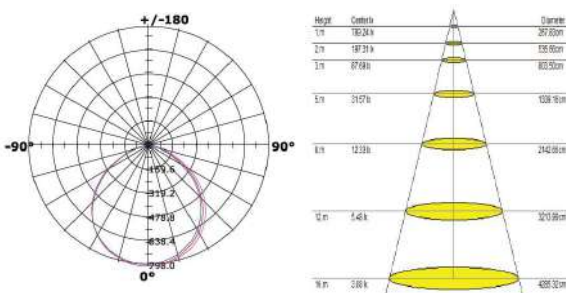

Key Data:

Power	24W
IP Rating	IP20
Dimensions	215×215×34mm
Cut-out size	200×200mm
Luminous Flux	2500Lm
Colour Temperature	4000K°/6500K°
Warranty	One year

Model No.

8 inch PL SQ 24W

Technical Specifications:

Total Circuit Power	24±2.4 W
Input Voltage	220-240V AC
Supply Current	192mA
Power Factor	0.5
Luminous Efficacy	105Lm/W
LED Type	SMD 2835
LED Circuit Mode	(39)S*(4)P=(156)PCS
LED Manufacturer	MLS
LED Board Base Type	MCPCB
Driver Output	156V
Driver Specifications	Buck
Lamp Viewing Angle	110°
Colour Rendering	>80 CRI
Operating Temp.	-20 to +40°C
Lifespan	25,000 hours
Electrical Class	2
Fire Rating	V-0
Energy Efficiency Index (EEI)	A+
Diffuser Material	PC
Housing Material/Colour	PA/Ra19003
Weight	280g

Product Features:

1. Using high lumen SMD light source
2. Using good reflectivity light, it is thinner and brighter, the light is more equally.
3. Low voltage & constant current driver, no glare, the light is soft.
4. Launch in 0.01sec, no flashing, no noise, no radiation and energy saving.
5. This product can show high brightness, without seeing the lamp itself.

<https://www.superlight.tn>

LED RECESSED DOWNLIGHT | 24W 200×200mm CUT-OUT (8")

Superlight®