

## LED FLOOD LIGHT 50W



240\*160mm



## KEY DATA

Power	50W
IP Rating	IP65
Dimension	240*160mm
Luminous Flux	5000 Lm
Colour Temperature	3000K°/4000K°/6500K°
Warranty	Two years
<b>Model Number</b>	<b>SFL 50w-PC</b>

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

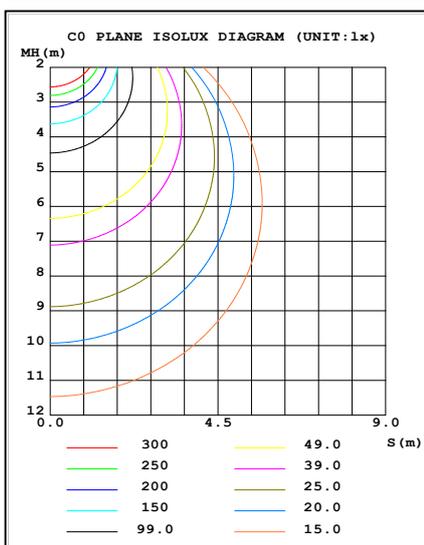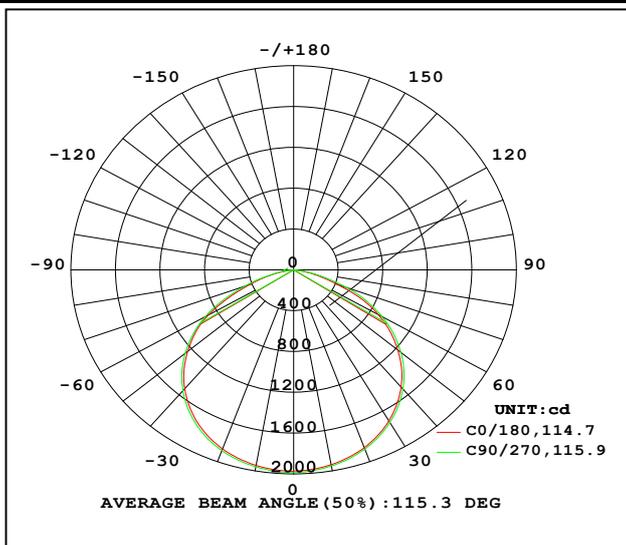

## TECHNICAL SPECIFICATIONS

Input Voltage	AC 170-265V
Power Factor	0,97
LED Type	SMD 2835
LED Luminous Flux	5000 Lm
Luminous Efficacy	100Lm/W
LED Manufacturer	CINDA
Frequency/Current	50HZ/0,227A
led board Base Type	AL 1060
Dimmable	NO
Total Circuit Power (W)	50W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	110°
Certificate	Pass LVD
Lens Material	Polycarbonate
Lifespan	25,000 hours
Material of heat sink	ADC12
Mounting Bracket	SPCC
Input cable length	200mm(H05RN-F 3*1,0mm2)
Weight	730g

## PRODUCT FEATURES:

1. Using high lumen SMD light source
2. Using good reflectivity light, it is thinner and brighter, the light is more equally.
3. Low voltage & constant current driver, no glare, the light is soft.
4. Launch in 0.01sec, no flashing, no noise, no radiation and energy saving.
5. This product can show high brightness, without seeing the lamp itself.

<https://www.superlight.tn>