

LED FLOOD LIGHT 100W

300*200mm




KEY DATA

Power	100W
IP Rating	IP65
Dimension	300*200mm
Luminous Flux	10000 Lm
Colour Temperature	3000K°/4000K°/6500K°
Warranty	Two years

Model Number

SFL 100w-PC

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

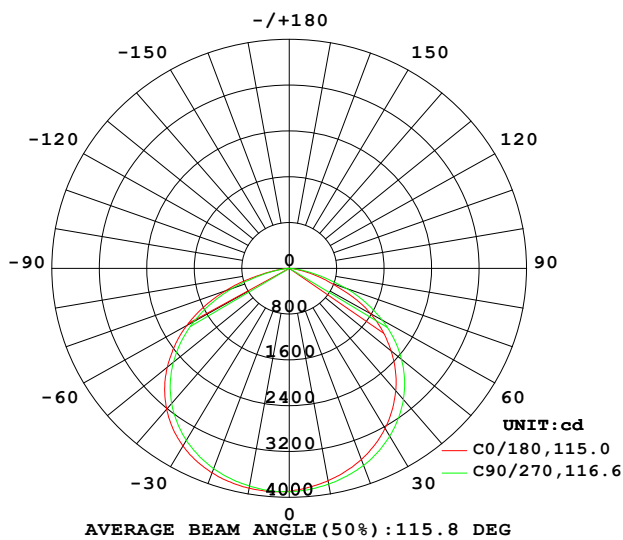

TECHNICAL SPECIFICATIONS

Input Voltage	AC 170-265V
Power Factor	0,97
LED Type	SMD 2835
LED Luminous Flux	10000 Lm
Luminous Efficacy	100Lm/W
LED Manufacturer	CINDA
Frequency/Current	50HZ/0,455A
led board Base Type	AL 1060
Dimmable	NO
Total Circuit Power (W)	100W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	110°
Certificate	Pass LVD
Lens Material	Polycarbonate
Lifespan	30,000 hours
Material of heat sink	ADC12
Mounting Bracket	SPCC
Input cable length	200mm(H05RN-F 3*1,0mm2)
Weight	1145g

PRODUCT FEATURES:

1. Using high lumen SMD light source
2. Using good reflectivity light, it is thinner and brighter, the light is more equally.
3. Low voltage & constant current driver, no glare, the light is soft.
4. Launch in 0.01sec, no flashing, no noise, no radiation and energy saving.
5. This product can show high brightness, without seeing the lamp itself.

Superlight®

